


## Product Parameters

Name	Parameter
Overall Dimensions	Φ172mmx113.5mm
Speed Ratio	23
Mass	3.6kg
Rated Voltage	DC 24V
Operating Voltage Range	DC 20-30V
Rated Current	8A
Rated Output Torque	20Nm
Rated Output Speed	35rpm
Peak Torque	40Nm
Peak Torque Density	11.11Nm/kg
Backlash	0.66°
Encoder Type	Incremental Magnetic Encoder
Encoder Resolution	2500C/T

## Structural Composition

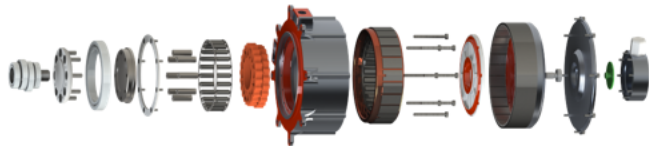

## Product Features

High-precision,  
low-backlash,  
intelligent control,  
adaptable.

High-power  
motor + large-  
torque reducer for  
strong output.



Integral potting:  
enables better  
heat dissipation,  
higher reliability.

Lightweight,  
modular,  
mountable via  
flange or shaft,  
versatile.

## Mechanical Interface

